



LOWER TERMINATIONS

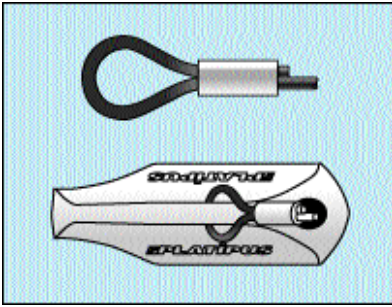

SOFT EYE

This type of termination can only be used with a ground anchor which has an eye.


An aluminium ferrule is used with plastic impregnated wire tendon.

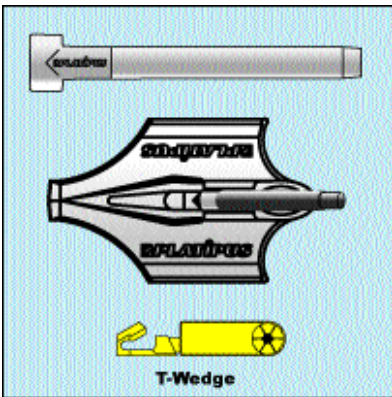

T-LOC

The main advantage of this type of termination is the flexibility it gives for on-site ground anchor system assembly.

All sizes of the 'Bat' anchor have been designed to T-Loc specification. The T-Loc is secured in the ground anchor using a T-Wedge.

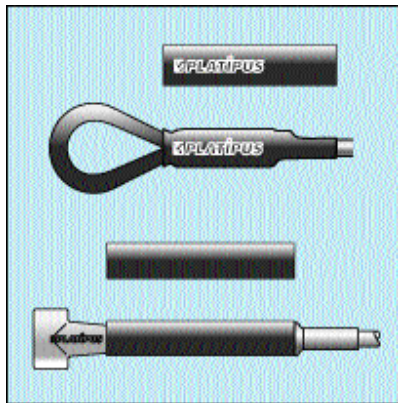

ENVIRONMENTAL SEALS

To enable an aluminium ferrule and a galvanised T-Loc to be swaged onto plastic impregnated wire tendon, the outer covering of the plastic must be stripped to expose the galvanised wire tendon underneath.

Consequently the swaged ferrule, T-Loc and exposed wire tendon are covered and environmentally sealed using a heat shrink sleeve.

The sleeve ensures that water cannot penetrate into the galvanised wire tendon, maintaining the plastic impregnated wire tendons resistance to corrosion.