


TOP ACCESSORIES

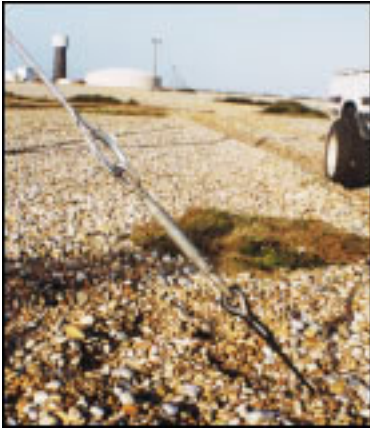

THE TURNBUCKLE

The turnbuckle is used in guyed applications. It is connected to the ground anchor system using a hard eye top termination.

Once the anchor system has been loadlocked and the turnbuckle has been fully extended it is connected to the guy wire of the structure. Final adjustment can be made by rotating the main body of the turnbuckle and retracting each end. Of galvanised steel construction, it accepts wire tendon \varnothing up to 12mm as standard. Other sizes and materials are also available.

